


KJ-SAJ Series

- ◆ Compact model with its volume reduced by 30% from the previous model.
- ◆ Low power consumption which makes battery drive possible, as typified by handy printer.

[Characteristic]

- Max. 12.0V supply voltage can be supplied.
- 1.0mm connecting terminal available.
- No resistance value rank classification needed

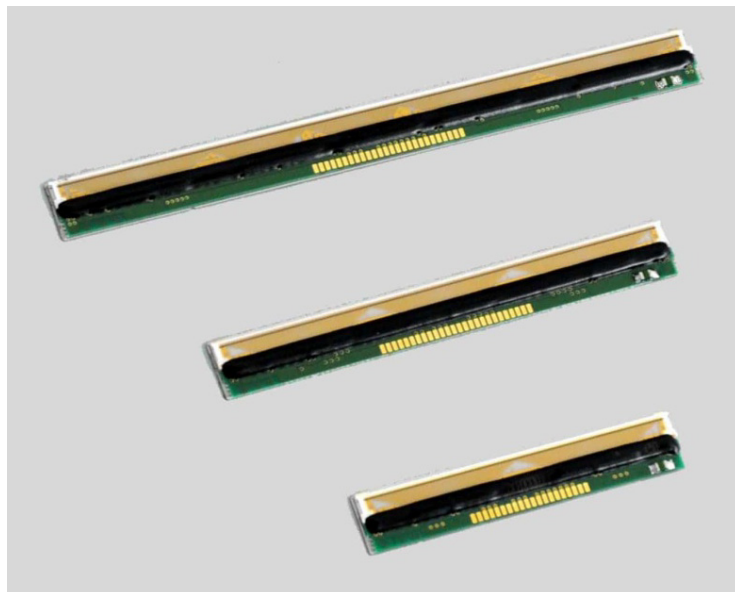


*Flexible to such customers requirements as pattern layout and heatsink shape with our well experienced technical staff.

■ Outline spec

	Print width	R value	Dot density	Platen diameter	Print speed	Vset	Vdd	Number of strobe	Abrasion life	Pulse life
KJ-SAJ048-8X470	48mm	176Ω	8dot/mm	φ8mm	100mm/s	4.0~12.0V(M)	3.0~5.0V	6	100km	100kk pulse
KJ-SAJ072-8A150	72mm							9		
KJ-SAJ104-8A350	104mm				7					
KJ-SAJ048-G8X490	48mm	120Ω			25mm/s	2.7~4.25V		6		

■ External dimension(mm)

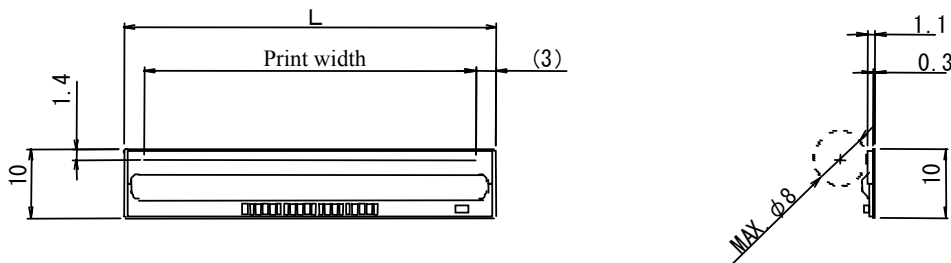

	L
KJ-SAJ048-8X470	54
KJ-SAJ072-8A150	78
KJ-SAJ104-8A350	110
KJ-SAJ048-G8X490	54