


外形寸法図

SOPシリーズ

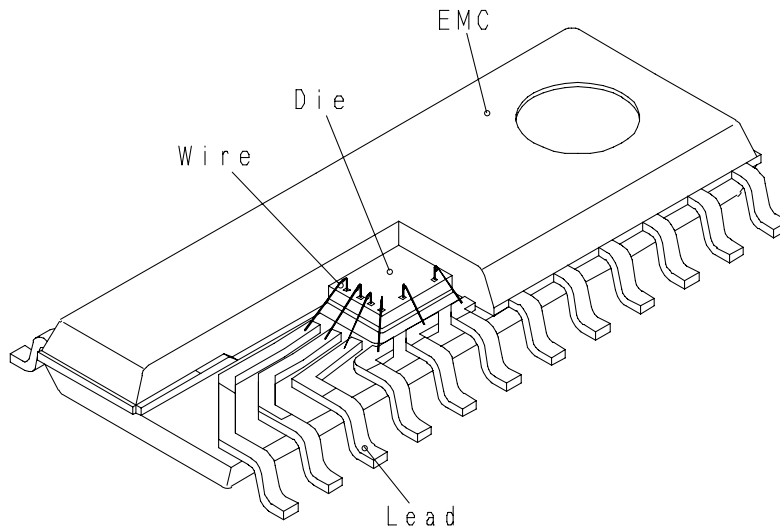

Lead Count	Body Width	Body Length	Body Thickness	Stand-off	Lead Pitch	Lead Material	Die Face Up/Down
7AA	5.50	6.00	1.70	0.10	1.27	Cu	U
7B	4.40	5.00	1.50	0.05	1.27	Cu	U
8A	5.50	6.00	1.70	0.10	1.27	Cu	U
8D	4.40	5.00	1.50	0.05	1.27	Cu	U
8J	3.90	5.02	1.50	0.15	1.27	Cu	U
8JN	3.90	5.02	1.50	0.15	1.27	Cu	U
8N	4.40	5.20	1.50	0.05	1.27	Cu/Fe	U
10A	4.40	5.00	1.50	0.05	1.00	Cu	U
14	4.40	8.90	1.50	0.05	1.27	Fe	U
16	4.40	10.20	1.50	0.05	1.27	Fe	U
16A	5.50	10.00	1.80	0.15	1.25	Fe	U
18	5.40	11.40	1.80	0.05	1.27	Cu/Fe	U
20	5.40	12.70	1.80	0.05	1.27	Fe	U
22	5.40	13.90	1.80	0.05	1.27	Fe	U
24	5.40	15.20	1.80	0.05	1.27	Fe	U
28	7.50	18.70	2.20	0.05	1.27	Cu/Fe	U
28B	7.60	17.60	1.80	0.05	1.27	Cu	U
28N	7.50	18.70	2.20	0.10	1.27	Cu	U
S16	4.40	6.80	1.50	0.05	0.80	Cu	U
S24B	5.40	10.20	1.80	0.10	0.80	Cu	U
S34A	7.60	17.60	1.80	0.05	1.00	Cu	U
S42A	7.60	17.60	1.80	0.05	0.80	Cu	U

Unit: mm

詳細については、当社営業部へ問い合わせ下さい。

Lead Count	Body Width	Body Length	Body Thickness	Stand-off	Lead Pitch	Lead Material	Die Face Up/Down
T16AB	4.40	5.00	1.00	0.10	0.65	Cu/Fe	U
T20A	4.40	6.50	1.00	0.10	0.65	Fe	U
T20D	4.40	6.50	1.00	0.10	0.65	Cu	U
T24A	4.40	6.50	1.00	0.10	0.50	Fe	U
V8	4.40	3.10	1.15	0.10	0.65	Fe	U
V8B	2.80	2.90	1.10	0.10	0.65	Cu	D
V8S	2.80	2.90	1.10	0.10	0.65	Cu	D
V10	4.40	3.10	1.15	0.10	0.50	Cu/Fe	U
V10A	2.80	2.90	1.10	0.10	0.50	Cu	D
V16	4.40	5.10	1.15	0.10	0.65	Cu	U
V24	5.60	7.90	1.15	0.10	0.65	Cu	U
V28	5.60	9.80	1.15	0.10	0.65	Cu	U

Unit: mm

詳細については、当社営業部へ問い合わせ下さい。